


1. Installation and maintenance instructions for LYSAGHT NEETSACREEN® PLUS, NEETASCREEN®, MINISCREEN® and MINISCREEN® PLUS, are available free on request from any BlueScope Lysaght office, distributor or from our website at www.lysaght.com
2. BlueScope Lysaght guarantees the performance of LYSAGHT® Fencing, provided it is installed and maintained in accordance with our recommendations.
3. BlueScope Lysaght Fencing should not be used within 1km of salt marine locations, severe industrial or unusually corrosive environments.
4. Special design details are available for cyclonic areas (regional velocity > 50m/s).
5. BlueScope Lysaght recommend that caps be installed on fence posts to avoid any potential personal injury and create the perfect finishing touch.

Colours featured in this brochure are indicative only. Colour names are not descriptive. For your final colour choice, always rely solely upon a steel colour sample. Samples may be sought from your proposed supplier or by telephoning 1800 645 630.

Copyright – All rights reserved 2002. The material in this publication is published by and is the property of BlueScope Lysaght and may not be reproduced in any form without the written permission of the publisher. Colorbond, Zinalume, Lysaght, Miniscreen and Neetascreen are registered trademarks of BlueScope Steel Limited, ABN 16 000 011 058.



BlueScope Lysaght Service Centres

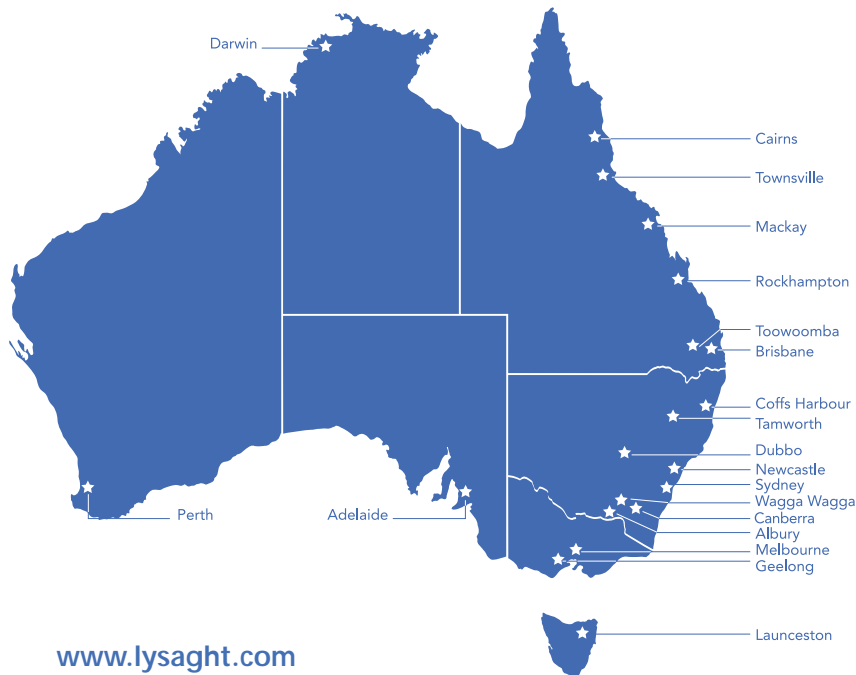

For information, brochures and your local distributor call
Steel Direct

1800 645 630








Please check the latest information which is always available at www.lysaght.com



www.lysaght.com

**Steel plus style...
Lysaght Fencing Solutions**



-  Roofing & Walling Solutions
-  Rainwater Solutions
-  Fencing Solutions
-  Home Improvements
-  Structural Solutions
-  House Framing Solutions
-  Customer Support



Neetascreen® Plus



Miniscreen® Plus



Neetascreen®



Miniscreen®

Style

LYSAGHT NEETASCREEN® PLUS and LYSAGHT MINISCREEN® PLUS fences set a new standard in style as well as adding value to your home.

The classic profile panels are supported by sturdy posts & finished off with diamond lattice & ball-capped posts.

LYSAGHT® Fencing is manufactured from quality all-Australian, pre-painted COLORBOND® steel or ZINCALUME® steel so it won't crack, chip, peel or warp, even in the harshest climate. You can choose from a wide range of COLORBOND® steel colours that can be mixed and matched to set off your home perfectly.

As well as NEETASCREEN® PLUS and MINISCREEN® PLUS you can choose the traditional NEETASCREEN® or MINISCREEN® profiles from the LYSAGHT range.

Strength

LYSAGHT Fencing Solutions offer the strength and benefits of COLORBOND® steel or ZINCALUME® steel. All are unsurpassed for low maintenance, durability, wind resistance, security, privacy – and are also fire and termite resistant.

LYSAGHT fences feature the Universal Rail with unique drainage holes, providing the flexibility of two rails in one. The specially designed posts give added resistance to the effects of strong winds, and our fences are certified to withstand wind gusts of up to 216km per hour.

LYSAGHT Fencing Solutions are designed to Australian Standards & are available in 1200, 1500, 1800 & 2100mm heights.

Support

When you buy LYSAGHT Fencing you have the comfort and security of dealing with one of the world's premier manufacturers of steel building solutions – BlueScope Lysaght.

For over 130 years, the LYSAGHT brand has stood for Australian quality at its finest and has been the major contributor to the character and durability of Australian homes and buildings.

All LYSAGHT Fencing Solutions are today covered by an exclusive 10 year warranty when it is installed and maintained in accordance with specifications.



Accessories

- Upgrade your fence to a PLUS® design with lattice and ball caps.
- Use post caps for safety and aesthetics.
- Gate kits in heights of 1200, 1500, 1800 & 2100mm
- Post feet, square posts and post stiffeners.

